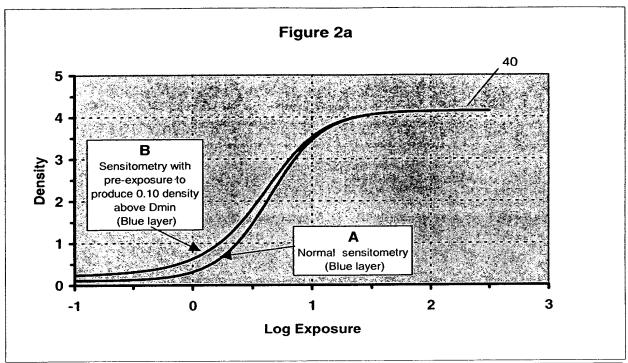
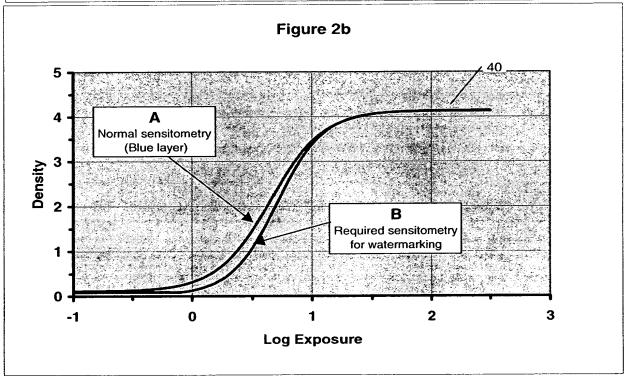


Fig. 1





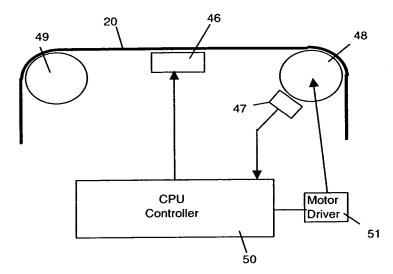


Fig 3a

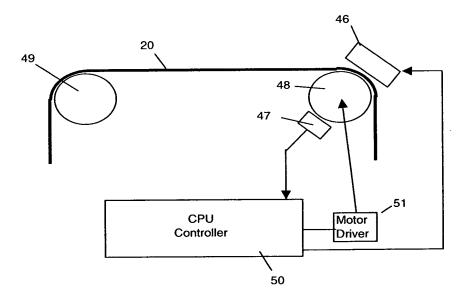


Fig 3b

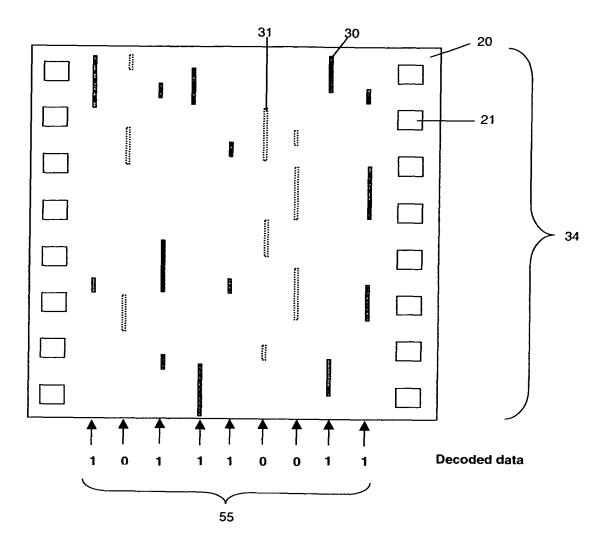



Fig 4

TI2397C 4-98
SPECTRAL SENSITIVITY, For Publication


KODAK VISION Color Print Film / 2383 Tungsten exp 1/50 sec; Process ECP-2B; D=1.0


Prior Art

Fig. 5

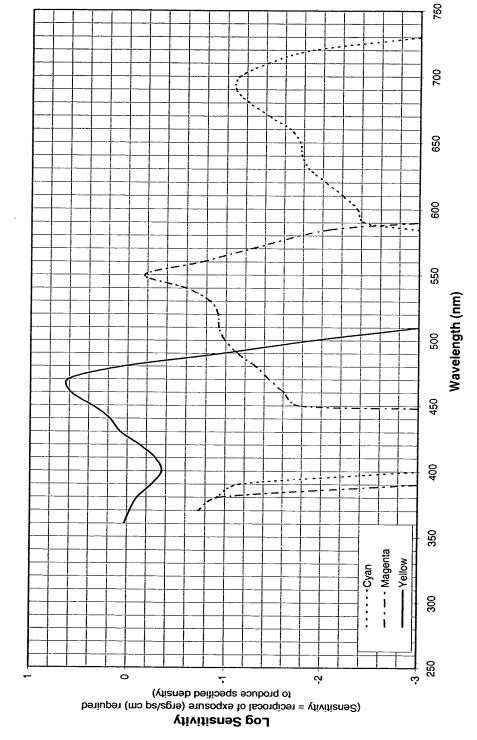

Notice: While the data presented are typical of production coatings, they do not represent standards which must be met by Eastman Kodak Company. Varying storage, exposure and processing conditions will affect results. The company reserves the right to change and improve product characteristics at any time.

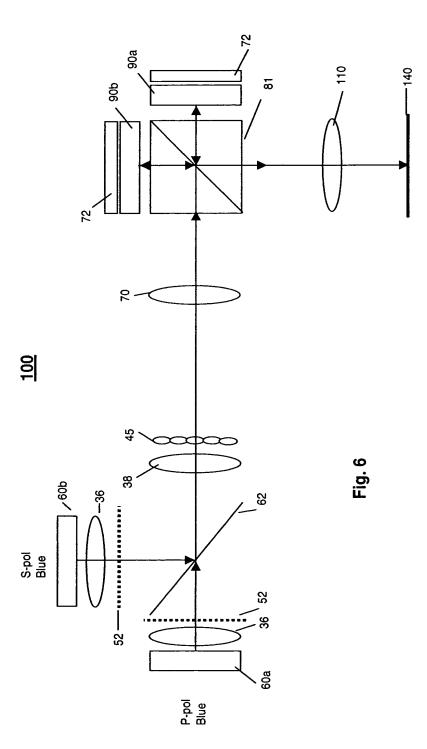

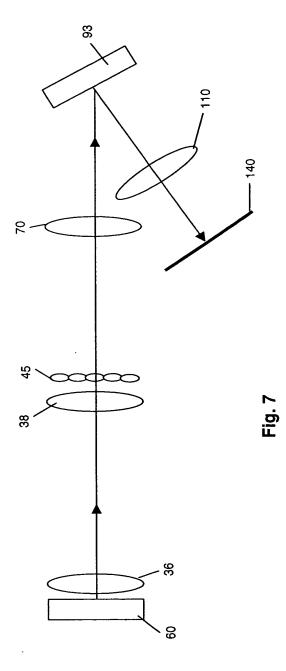

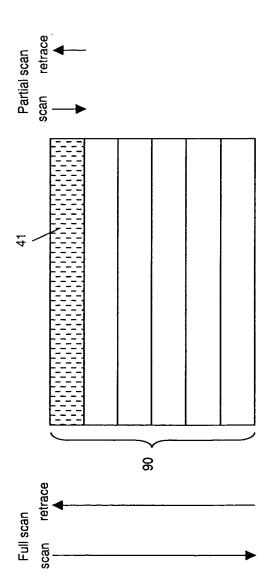


Fig. 8





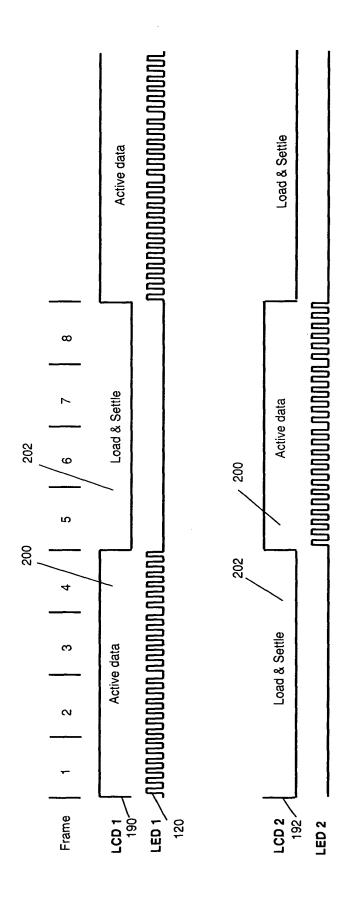


Fig. 9

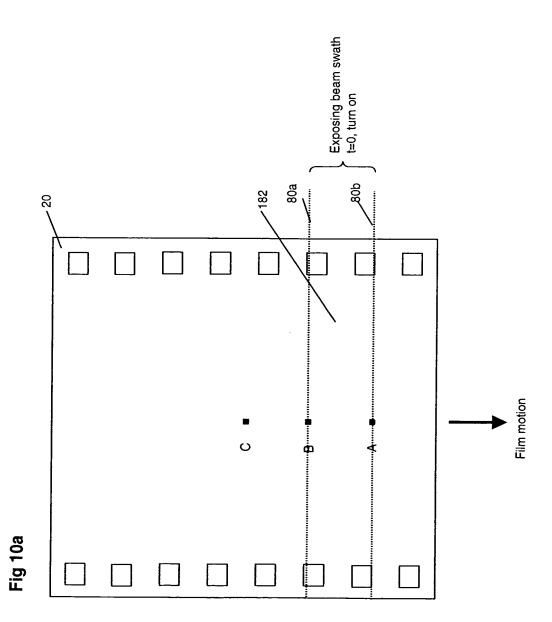

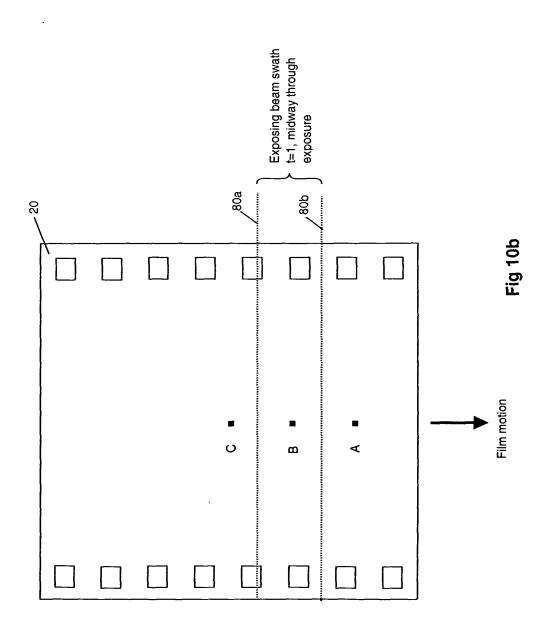

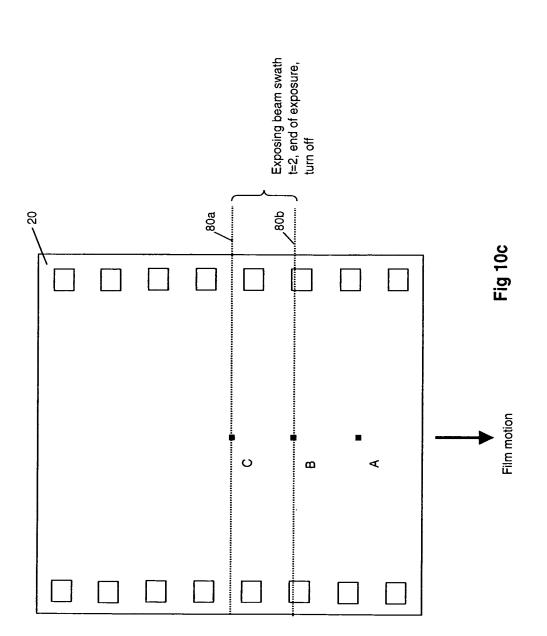


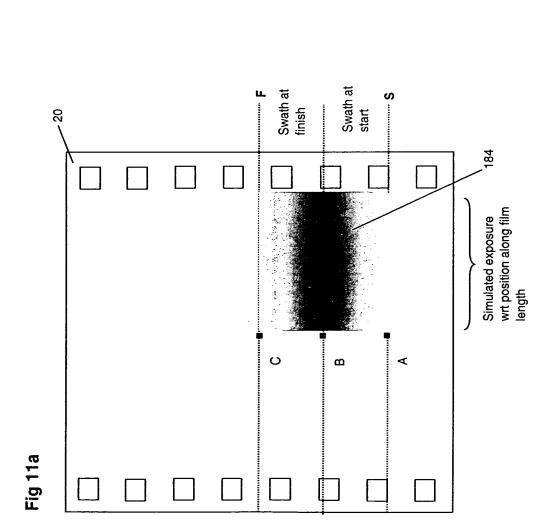


B Cosition or Distance


Integrated Exposure or Total Exposure


Fig 11b

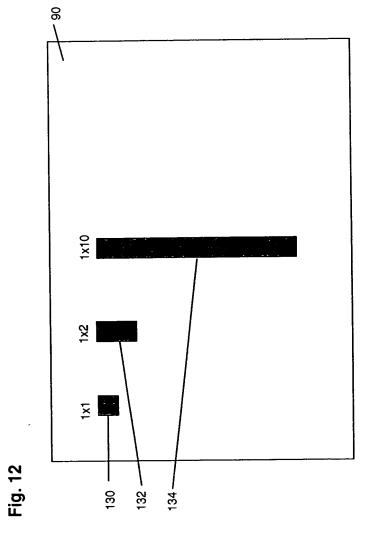


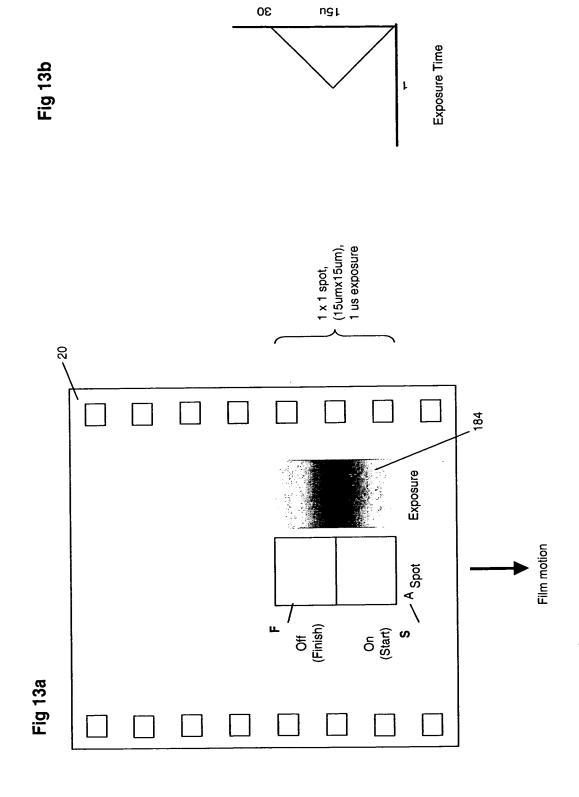



Distanc

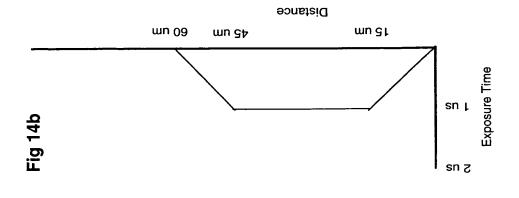

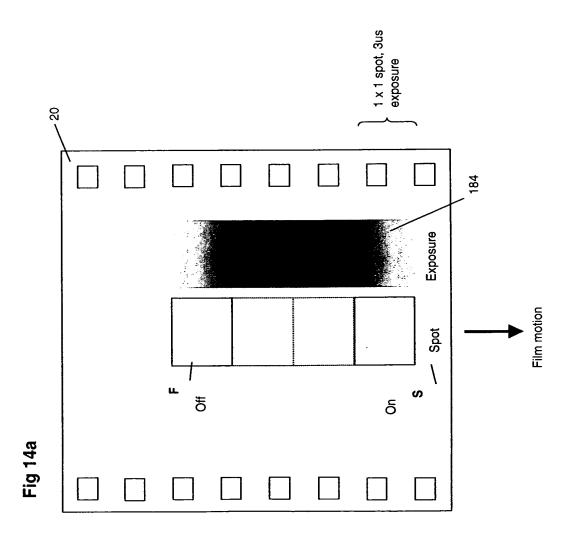

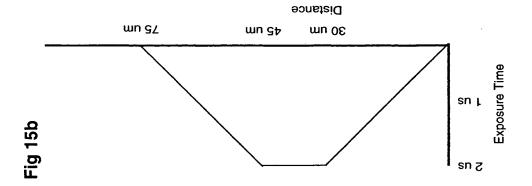

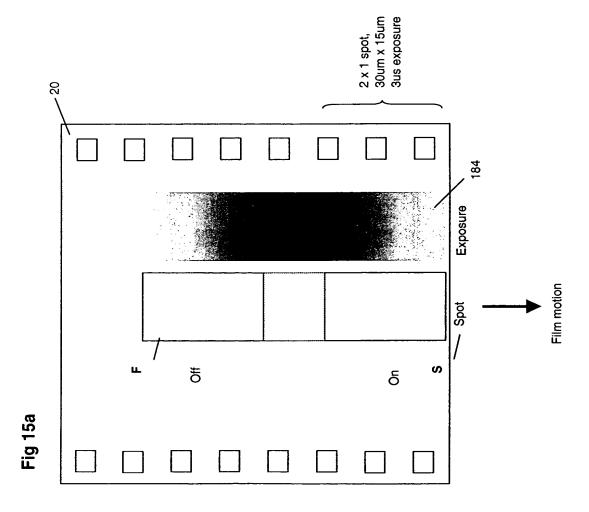

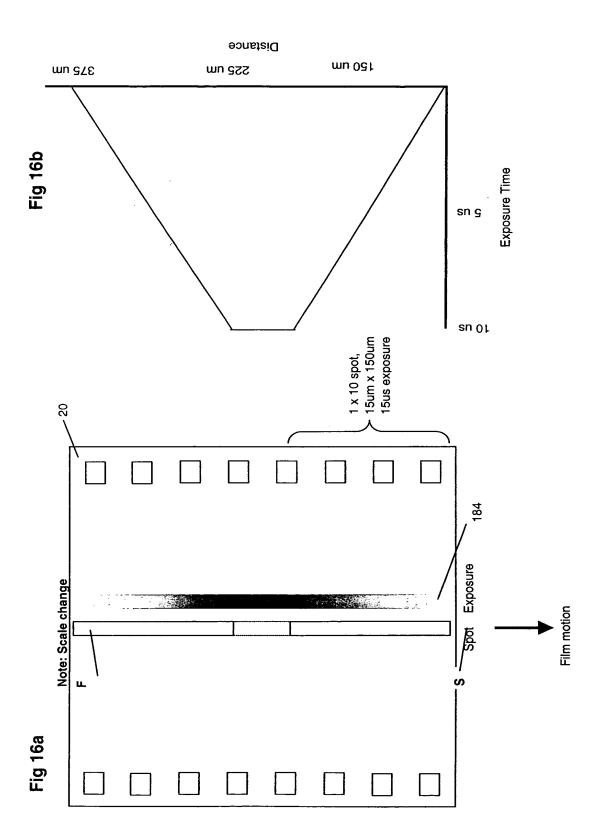

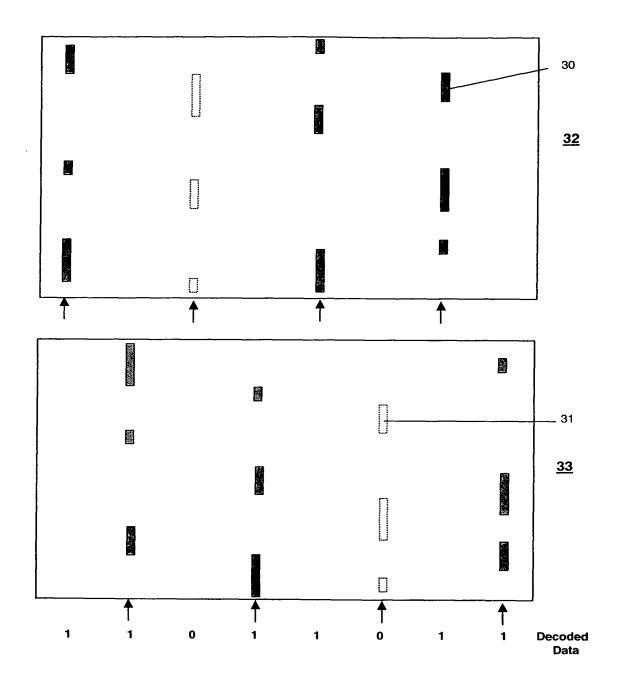


Fig. 17

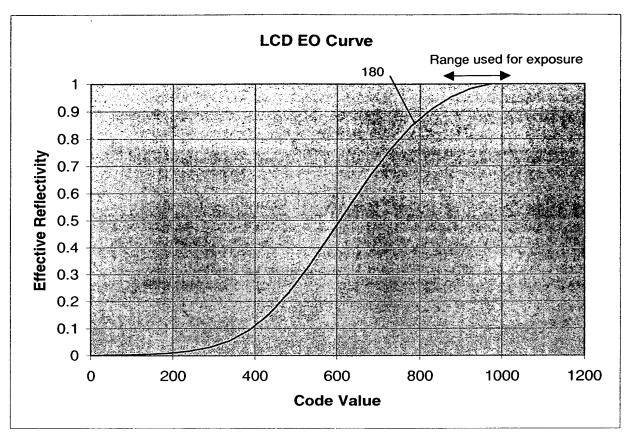


Fig. 18

Fig. 19

